

TECHNICAL DATA SHEET

T-piece 45° For smooth-wall pipes

Conformity:
EN 1852


PRODUCT DESCRIPTION

T-piece from polypropylene (PP) with an integrated sealing ring which grants a hermetic seal (pressure rating $\geq 0,5$ bar). PUR coating increases resistance to UV radiation to 10 years.


Material: Polypropylene (PP)

Colour: grey (other colours available on request).


APPLICATION AREA

Water drainage systems for bridges and overpasses with a direct exposure to sunlight.

PRODUCT DIMENSIONS

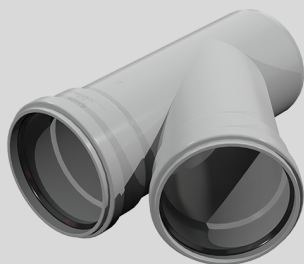

DN/OD [mm]	D [mm]	C [mm]	L [mm]	Z [mm]	L1 [mm]	Z1 [mm]	A [mm]	Z2 [mm]
110	135	60	286	187	64	35	127	127
160	184	74	408	252	85,5	35	234,5	199
200	232	100	544	377	117	50	277	277
250	290,8	123	676	467	144	65	344	344
315	361,1	146	832	581	171	80	435	435
400	455,3	173	1085	911	190	178	544	738

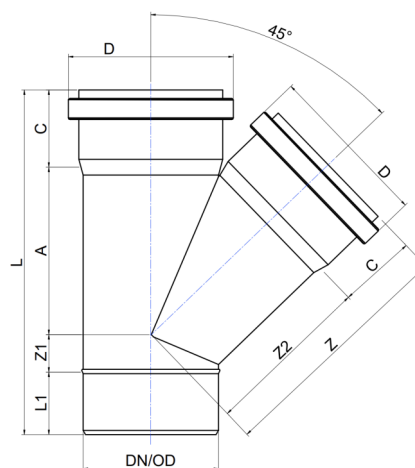

PRODUCT PARAMETERS

Parameter	Value
Material	PP
Water tightness	0.5 bar
UV radiation resistance	10 years