

TECHNICAL DATA SHEET



EVCAB SPLIT N 750 1.2m

Split cable protection pipes

Conformity:
EN 61386-24

PRODUCT DESCRIPTION

EVCAB SPLIT N 750 PP-EPDM (high quality recycled plastic) split pipes consist of two halves with integrated locking system that can safely enclose an existing bundle of cables. The divisible pull-resistant sleeve provides an ideal connection to ensure that the entire line remains fully protected, even over long distances. The split pipe can be reused many times and it is also 100% recyclable.



Material: PP-EPDM (High quality recycled plastic), impact resistance code N, compression strength 750N.


Produced according to: EN 61386-24 standard specifications.

APPLICATION AREA

EVCAB SPLIT N 750 smooth-wall split cable protection pipes are designed to assist the repairs of power cable, electrical wire, telecommunication, television, and signal cable line ruptures and for mechanical protection and insulation of cables in sections where cable protection pipes of other types cannot be used.

EVCAB SPLIT N 750 pipes can be installed under and over the ground.

Bend angle at connection points up to 15°.

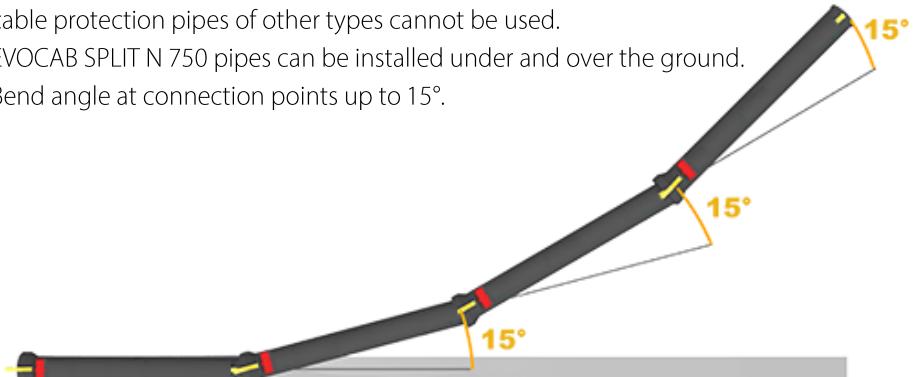

Impact resistance:
N (normal)

Compression strength:
750

Open product

PRODUCT DIMENSIONS

Outside OD, mm	160.0
Inside ID, mm	153
Straight length, m	1.2
Connection angle	≤15°

PRODUCT PARAMETERS

Parameter	Value	Test method
Material	PP-EPDM (high quality recycled plastic)	
Combustion	Combustible	EN 61386-24
Impact resistance code	N	EN 61386-24
Compression strength, N	750	EN 61386-24