Langervaldes iela 2a,
Jelgava, Latvia, LV-3002

Phone: +371 630-943-00
e-mail: Info@evopipes.lv

Website: www.evopipes.lv

TECHNICAL DATA SHEET

EVOCAB SPLIT N 750

Split cable protection pipes

Conformity:
EN 50626-1

PRODUCT DESCRIPTION

EVOCAB SPLIT N 750 PP-EPDM (high quality recycled plastic) split pipes consist of two halves and integrated locking system that can safely enclose an existing bundle of cables. It is a divisible pipe solution with an integrated connection system and side clamp, which can be installed quick and easy, without requiring any tools. The divisible pull-resistant sleeve provides an ideal connection to ensure that the entire line remains fully protected, even over long distances. The split pipe can be reused many times and it is also 100% recyclable.
EVOCAB SPLIT N 750 is available in sizes of DN/OD 110, 160 and 220 mm with length of 1 m.
Material: PP (Polypropylene), impact resistance code N, compression strength 750N.




Impact resistance:
N (normal)
Compression strength:
750 N

Open product

APPLICATION AREA

EVOCAB SPLIT N 750 smooth-wall split cable protection pipes are designed to assist the repairs of power cable, electrical wire, telecommunication, television, and signal cable line ruptures and for mechanical protection and insulation of cables in sections where cable protection pipes of other types cannot be used.
EVOCAB SPLIT N 750 pipes can be installed under and over the ground.
Bend angle at connection points up to 15°.

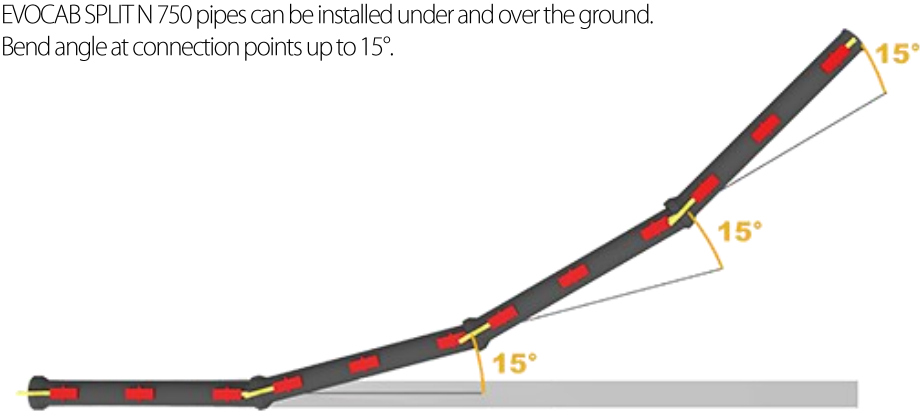

PRODUCT DIMENSIONS

Outside OD, mm	110	160	160	220
Inside ID, mm	99	144	153	200
Wall thickness, mm	5.5	8.0	3.5	10.0
Straight length, m	1	1	1.2	1
Bend radius, for 1m	≤15°	≤15°	≤15°	≤15°

Langervaldes iela 2a,
Jelgava, Latvia, LV-3002

Phone: +371 630-943-00
e-mail: Info@evopipes.lv

Website: www.evopipes.lv

TECHNICAL DATA SHEET

EVOCAB SPLIT N 750

Split cable protection pipes

Conformity:
EN 50626-1

PRODUCT PARAMETERS

Parameter	Value	Test method
Material	PP-EPDM (high quality recycled plastic)	
Combustion	Combustible	EN 60695-11-2:2018
Impact resistance code	N	EN 50626-1
Compression strength, N	750	EN 50626-1
Flexibility	Rigid	EN 50626-1
IP protection rating	IP3X*	EN 50626-1

* 3 - protection against ingress of solid objects
X– protection against ingress of water - not tested



MARKING ON PIPE

Parameter	Marking
Compliance with standard	EN 50626-1
Manufacturer	EVOPIPES
Product identificator	EVOCAB SPLIT
Nominal size, mm	110
Resistance to impact	N (Normal)
Resistance to compression, N	750

Impact resistance:
N (normal)
Compression strength:
750 N

Open product